APLUS

PCR TIRES

Catalogue 2014-2015

Manufacture Introduction

ShanDong Haohua Tire Co.,LTD (hereinafter Haohua) is located in Weifang Binhai Economic -Technological Development Area ,which is a beautiful national economic belt around Bohai Sea District. Haohua was founded in 2011 with the total covering area of 500,000 square meters and the total construction area of 380,000 square meters, and Haohua actively reflects the greeen idea in all respects as a large modern enterprise.

Haohua has the advanced research and development capabilities , excellent production process , modern test equipment, and the professional technical management team (the general situation of the team members is that the average work experience in tire industry is about 15 years, including two senior economists, five senior engineer, 16 mid-class engineers, three doctors, and five masters).

Our Manufacture

- Location : Shandong Weifang Binhai Industrial Area
- Total Capability : 20Million PCR & 2 Million TBR per year.
- At present PCR 20000pcs per day . 2014 Annual output : 8 million
- 2015 will put the 2nd line of production for PCR , 2015 total capatility : 10 million
- Investments: 200Million US$ Staffs:4000 persons +/-
- Equipments:First class equipment s from Germany , Holland , Japan and China.
- Approved Quality standards : ISO / DOT / ECE / GCC / INMETRO / PC/ REACH /LABEL

Enjoying high popularity in both domestic and international markets ,We mainly specialize in designing and supplying all kinds of redial tyres, including Passagers Car Tyres, SUV tyres, Light Truck Tyres, A/T, H/T, VAN , M/T, VAN, Truck and Bus Tyres etc. All the pattern are designed according to the latest markets requirements by our smart team, All the tyres are produced under the first class equipments and strict quality management system to ensure the stable quality. Until now we already own over 160 sizes, we will eventually reach 280 sizes.

It's worth mentioning that we did a lot of testing in the world, for example Smith laboratories of the United States, South Africa and so on. We all got very good data, so looking forward to the futurity, we feel full of confidence.

With high quality, reasonable price and excellent service, we are able to be one of your best tyre suppliers and long term of business and partners.

Patterns Introduction

A606

A607

A608

A919

A/T A929

M/T A929

A866

A867

A868

A501

A502

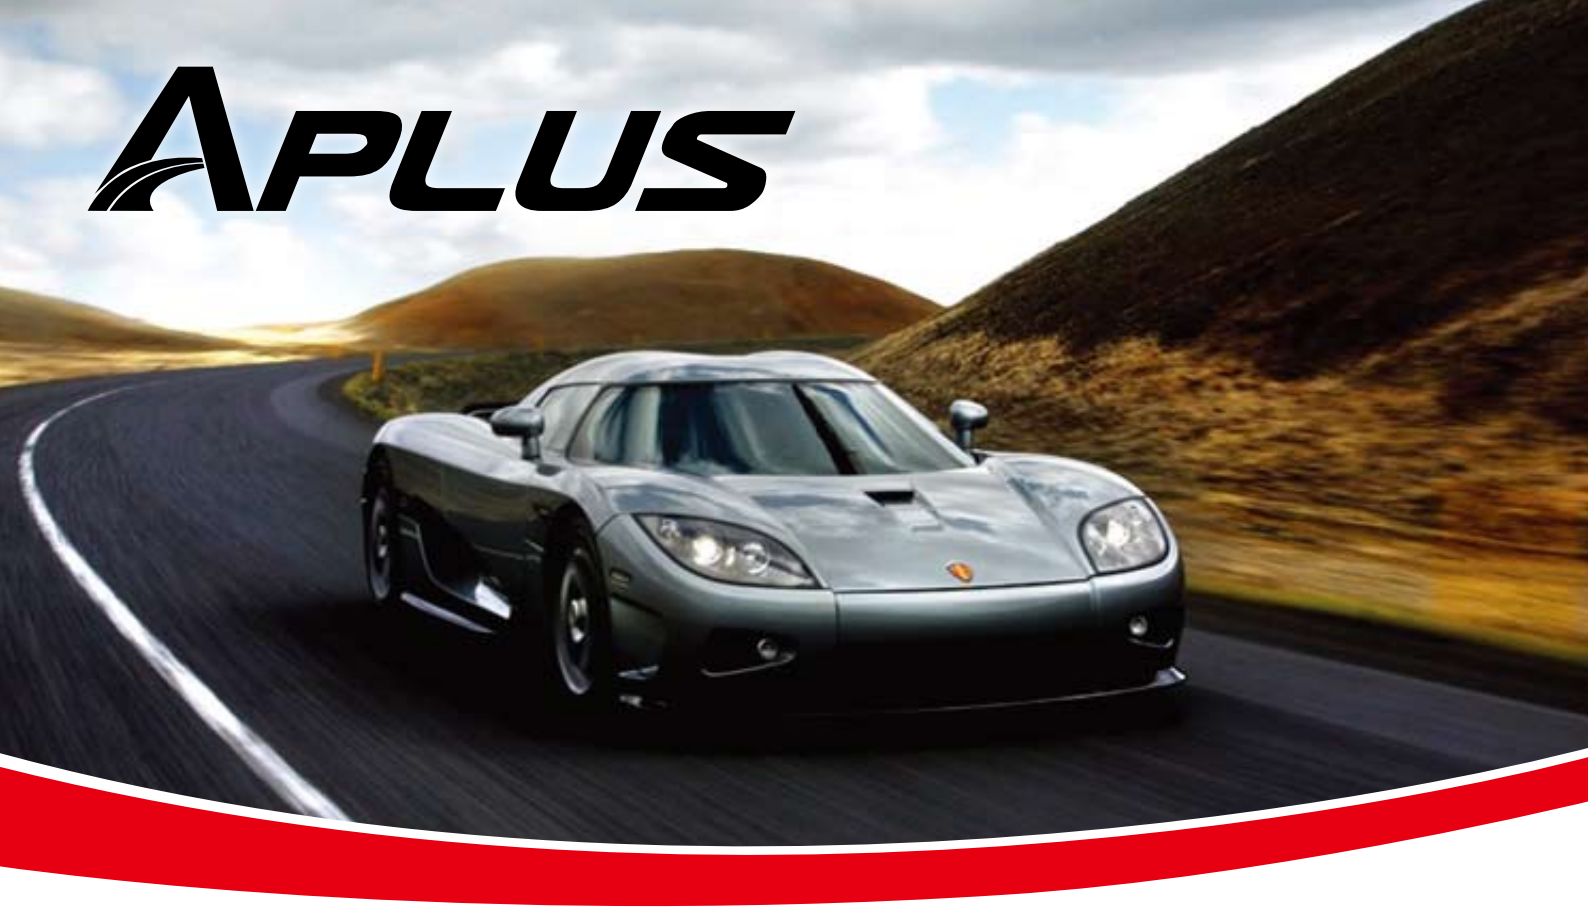

A606

UTQG:420 A A

❶Four wide circumferential tread grooves deliver the ride stability and offer excellent performance on wet conditions. Improved grooves and bead profile design offer better ride stability, endurance and handling performance.

❷Continuous tread blocks on both shoulder give great support to enhance the stability when cornering, the closed shoulders deliver excellent quiet ride.

❸Continuous solid center ribs and lateral tread blocks connected by rib-in-chain enhance steering stability, decrease block deformation and reduce energy loss.

❹Special tread compound delivers excellent grip on both dry and wet roads and offer longer mileage.

Summer Tire

Sizes Description	Sidewall Description	Tread Depth MM	Tread Depth 1/32"	Standard Rim	Section Width (mm)	OA. Diameter (mm)	Max. Pressure (kpa/PSI)				dB
155/65R13 73T	BLK	7.30	9.2	5.0	157	540	300/44	E	C		68
155/70R13 75T	BLK	7.30	9.2	4.5	157	548	300/44	E	C		68
155/80R13 79T	BLK	7.30	9.2	4.5	157	578	300/44	E	C		68
165/65R13 77T	BLK	7.30	9.2	5.0	170	544	300/44	E	C		68
165/70R13 79T	BLK	7.30	9.2	5.0	170	562	300/44	E	C		68
165/80R13 83T	BLK	7.30	9.2	4.5	165	594	300/44	E	C		68
*175/60R13 77H	BLK	7.30	9.2	5.0	177	540	300/44	E	C		68
175/70R13 82T	BLK	7.30	9.2	5.0	177	576	300/44	E	C		68
185/70R13 86T	BLK	7.50	9.4	5.5	189	590	300/44	E	C		68
**155/65R14 75H	BLK	7.30	9.2	4.5	154	557	300/44	E	C		68
**165/60R14 75H	BLK	7.30	9.2	5.0	170	554	300/44	E	C		68
**165/65R14 79H	BLK	7.30	9.2	5.0	170	570	300/44	E	C		68
**165/70R14 81H	BLK	7.30	9.2	5.0	170	588	300/44	E	C		68
175/65R14 82H	BLK	7.30	9.2	5.0	177	584	300/44	E	C		68
175/65R14 86TXL	BLK	7.30	9.2	5.0	177	584	340/50	E	C		68
175/70R14 84H	BLK	7.30	9.2	5.0	177	602	300/44	E	C		68
175/70R14 88TXL	BLK	7.30	9.2	5.0	177	602	340/50	E	C		68
185/60R14 82H	BLK	7.50	9.4	5.5	189	578	300/44	E	C		68
185/65R14 86H	BLK	7.50	9.4	5.5	189	609	300/44	E	C		68
185/70R14 88H	BLK	7.50	9.4	5.5	189	616	300/44	E	C		68
195/60R14 86H	BLK	7.50	9.4	6.0	201	590	300/44	E	C		69
195/70R14 91H	BLK	7.50	9.4	6.0	201	630	300/44	E	C		69
*205/60R14 88H	BLK	7.80	9.8	6.0	209	602	300/44	E	C		69
205/70R14 95H	BLK	7.80	9.8	6.0	209	644	300/44	E	C		69
215/70R14 96H	BLK	8.00	10.0	6.5	220	654	300/44	E	C		70
**175/55R15 77H	BLK	7.50	9.4	5.5	182	573	300/44	E	C		68
**175/60R15 81H	BLK	7.50	9.4	5.0	177	591	300/44	E	C		68
175/65R15 84H	BLK	7.50	9.4	5.0	177	609	300/44	E	C		68
185/55R15 82V	BLK	7.50	9.4	6.0	194	585	300/44	E	C		68
185/60R15 84H	BLK	7.50	9.4	5.5	189	603	300/44	E	C		68
185/60R15 88HXL	BLK	7.50	9.4	5.5	189	603	340/50	E	C		68
185/65R15 88H	BLK	7.50	9.4	5.5	189	621	300/44	E	C		68
185/65R15 92HXL	BLK	7.50	9.4	5.5	189	621	340/50	E	C		68
195/60R15 88H	BLK	7.50	9.4	6.0	201	615	300/44	E	C		69
195/60R15 88V	BLK	7.50	9.4	6.0	201	615	300/44	E	C		69
195/65R15 91V	BLK	7.50	9.4	6.0	201	635	300/44	E	C		69
195/65R15 95HXL	BLK	7.50	9.4	6.0	201	635	340/50	E	C		69
205/60R15 91V	BLK	7.80	9.8	6.0	209	627	300/44	E	C		69
205/65R15 94H	BLK	7.80	9.8	6.0	209	647	300/44	E	C		69
205/65R15 94V	BLK	7.80	9.8	6.0	209	647	300/44	E	C		69
205/70R15 96H	BLK	7.80	9.8	6.0	209	669	300/44	E	C		69
215/60R15 94H	BLK	8.00	10.0	6.5	218	638	300/44	E	C		70
215/65R15 96H	BLK	8.00	10.0	6.5	221	661	300/44	E	C		70
215/65R15 100HXL	BLK	8.00	10.0	6.5	221	661	340/50	E	C		70
215/70R15 98H	BLK	8.00	10.0	6.5	221	683	300/44	E	C		70
225/70R15 100H	BLK	8.00	10.0	6.5	228	697	300/44	E	C		70
205/55R16 91V	BLK	7.80	9.8	6.5	214	632	300/44	E	C		69
205/60R16 92V	BLK	7.80	9.8	6.0	209	652	300/44	E	C		69
205/60R16 96HXL	BLK	7.80	9.8	6.0	209	652	340/50	E	C		69
215/60R16 95V	BLK	8.00	10.0	6.5	221	664	300/44	E	C		70
215/60R16 99HXL	BLK	8.00	10.0	6.5	221	664	340/50	E	C		70
215/65R16 98H	BLK	8.00	10.0	6.5	221	686	300/44	E	C		70
225/60R16 98H	BLK	8.00	10.0	6.5	228	676	300/44	E	C		70
235/60R16 100H	BLK	8.00	10.0	7.0	240	688	300/44	E	C		70

* New Developing Sizes ** New Developing Sizes in 2014

The labeling information is subjet to change without notice.

European Technology @ Competitive Price

A607

UTQG:300 A A

❶Four wide circumferential tread grooves and lateral grooves with fine sipes provide efficient water evacuation, outstanding wet performance.

❷Continuous block patterns on shoulder enhance the ride stability at high speed cornering. The rim protector will protect wheels from curb damage

❸Continuous outside tread blocks enhance excellent performance and precise control when cornering at high speed. The special rib segment design optimize contact pressure distribution, improve road contact area and provide precise control. The serrated groove walls absorb noise and deliver a quieter ride.

❹Special tread compound delivers excellent grip on both dry and wet roads and reduce the rolling resistance to save oil and protect environment.

Summer Tire

Sizes Description	Sidewall Description	Tread Depth MM	Tread Depth 1/32"	Standard Rim	Section Width (mm)	OA. Diameter (mm)	Max. Pressure (kpa/PSI)				dB
**195/45R15 82VXL	BLK	8.00	10.0	6.5	195	557	340/50	E	C		70
195/50R15 82V	BLK	8.00	10.0	6.0	201	577	300/44	E	C		70
195/55R15 85V	BLK	8.00	10.0	6.0	201	595	300/44	E	C		70
**185/55R16 87VXL	BLK	8.00	10.0	6.0	194	610	340/50	E	C		70
*195/45R16 84VXL	BLK	8.00	10.0	6.5	195	582	340/50	E	C		70
**195/50R16 88VXL	BLK	8.00	10.0	6.0	201	602	340/50	E	C		70
*195/55R16 91VXL	BLK	8.00	10.0	6.0	190	619	340/50	E	C		70
205/45R16 87WXL	BLK	8.00	10.0	7.0	206	590	340/50	E	C		70
205/50R16 91WXL	BLK	8.00	10.0	6.5	214	612	340/50	E	C		70
205/55R16 94WXL	BLK	8.00	10.0	6.5	214	632	340/50	E	C		70
215/55R16 97WXL	BLK	8.00	10.0	7.0	226	642	340/50	E	C		71
225/55R16 99WXL	BLK	8.00	10.0	7.0	233	680	340/50	E	C		71
205/40R17 84WXL	BLK	8.00	10.0	7.5	212	596	340/50	E	C		70
205/45R17 88WXL	BLK	8.00	10.0	7.0	206	616	340/50	E	C		70
205/50R17 93WXL	BLK	8.00	10.0	6.5	214	638	340/50	E	C		70
**215/40R17 87WXL	BLK	8.00	10.0	7.5	218	604	340/50	E	C		71
215/45R17 91WXL	BLK	8.00	10.0	7.0	213	626	340/50	E	C		71
215/50R17 95WXL	BLK	8.00	10.0	7.5	226	648	340/50	E	C		71
215/55R17 98WXL	BLK	8.00	10.0	7.0	226	668	340/50	E	C		71
225/45R17 94WXL	BLK	8.00	10.0	7.5	225	634	340/50	E	C		71
225/50R17 98WXL	BLK	8.00	10.0	8.0	233	658	340/50	E	C		71
225/55R17 101WXL	BLK	8.00	10.0	7.0	233	680	340/50	E	C		71
235/45R17 97WXL	BLK	8.00	10.0	7.5	236	644	340/50	E	C		71
**235/50R17 100WXL	BLK	8.00	10.0	7.5	245	668	340/50	E	C		71
235/55R17 103WXL	BLK	8.00	10.0	7.5	245	690	340/50	E	C		71
**245/45R17 99WXL	BLK	8.00	10.0	8.0	243	652	340/50	E	C		72
215/35R18 84WXL	BLK	8.00	10.0	7.5	218	607	340/50	E	C		71
**215/40R18 89WXL	BLK	8.00	10.0	7.5	218	629	340/50	E	C		71
225/40R18 92WXL	BLK	8.00	10.0	8.5	230	637	340/50	E	C		71
225/45R18 95WXL	BLK	8.00	10.0	7.5	225	659	340/50	E	C		71
235/40R18 95WXL	BLK	8.00	10.0	8.5	241	645	340/50	E	C		71
*235/45R18 98WXL	BLK	8.00	10.0	8.0	240	667	340/50	E	C		71
*235/50R18 101WXL	BLK	8.00	10.0	7.5	243	693	340/50	E	C		71
245/40R18 97WXL	BLK	8.00	10.0	8.5	248	653	340/50	E	C		72
245/45R18 100WXL	BLK	8.00	10.0	8.0	243	677	340/50	E	C		72
*245/50R18 104WXL	BLK	8.00	10.0	7.5	252	704	340/50	E	C		72
*255/35R18 97WXL	BLK	8.00	10.0	9.0	260	635	340/50	E	C		72
*255/40R18 99WXL	BLK	8.00	10.0	9.0	263	661	340/50	E	C		72
**255/45R18 103WXL	BLK	8.00	10.0	8.5	257	687	340/50	E	C		72
**215/35R19 85WXL	BLK	8.00	10.0	7.5	221	633	340/50	E	C		71
**225/35R19 88WXL	BLK	8.00	10.0	8.0	232	642	340/50	E	C		71
235/35R19 91WXL	BLK	8.00	10.0	8.5	241	647	340/50	E	C		71
245/35R19 93WXL	BLK	8.00	10.0	8.5	248	655	340/50	E	C		72
**245/40R19 98WXL	BLK	8.00	10.0	8.5	251	679	340/50	E	C		72
**255/40R19 100WXL	BLK	8.00	10.0	9.0	263	687	340/50	E	C		71
**225/30R20 85WXL	BLK	8.00	10.0	8.0	229	644	340/50	E	C		71
225/35R20 93WXL	BLK	8.00	10.0	8.0	230	666	340/50	E	C		72
*245/30R20 97WXL	BLK	8.00	10.0	8.5	247	657	340/50	E	C		72
245/35R20 95WXL	BLK	8.00	10.0	8.5	248	680	340/50	E	C		72
**245/45R20 103WXL	BLK	8.00	10.0	8.0	243	728	340/50	E	C		72
*255/35R20 97WXL	BLK	8.00	10.0	9.0	260	686	340/50	E	C		72
**255/45R20 105WXL	BLK	8.00	10.0	8.5	255	738	340/50	E	C		72
**275/30R20 97WXL	BLK	8.00	10.0	9.5	278	675	340/50	E	C		72
**275/35R20 102WXL	BLK	8.00	10.0	9.5	278	701	340/50	E	C		72
**235/30R22 90WXL	BLK	8.00	10.0	8.5	242	701	340/50	E	C		72
**245/30R22 92WXL	BLK	8.00	10.0	8.5	247	708	340/50	E	C		72
**255/30R22 95WXL	BLK	8.00	10.0	9.0	259	713	340/50	E	C		72
**245/30R24 95WXL	BLK	8.00	10.0	8.5	248	758	340/50	E	C		72
**255/30R24 97WXL	BLK	8.00	10.0	9.0	255	767	340/50	E	C		72
**275/25R24 96WXL	BLK	8.00	10.0	10.0	277	751	340/50	E	C		72

* New Developing Sizes ** New Developing Sizes in 2014
The labeling information is subjet to change without notice.

APLUS

A607

UTQG:420 A A

❶Four wide circumferential tread grooves and lateral grooves with fine sipes provide efficient water evacuation, outstanding wet performance.

❷Continuous block patterns on shoulder enhance the ride stability at high speed cornering. The rim protector will protect wheels from curb damage

❸Continuous outside tread blocks enhance excellent performance and precise control when cornering at high speed. The special rib segment design optimize contact pressure distribution, improve road contact area and provide precise control. The serrated groove walls absorb noise and deliver a quieter ride.

❹Special tread compound delivers excellent grip on both dry and wet roads and reduce the rolling resistance to save oil and protect environment.

Summer Tire

Sizes Description	Sidewall Description	Tread Depth MM	Tread Depth 1/32"	Standard Rim	Section Width (mm)	O.A. Diameter (mm)	Max. Pressure (kpa/PSI)				dB
235/65R17 108HXL	BLK	8.50	10.8	7.0	240	738	340/50	E	C		71
245/65R17 107H	BLK	8.50	10.8	7.0	248	750	300/44	E	C		72
**255/60R17 110VXL	BLK	8.50	10.8	7.5	260	738	340/50	E	C		72
255/65R17 110H	BLK	8.50	10.8	7.5	260	764	300/44	E	C		72
265/65R17 112H	BLK	8.50	10.8	8.0	272	776	300/44	E	C		72
255/55R18 109VXL	BLK	8.50	10.8	8.0	265	737	340/50	E	C		72
*255/60R18 112VXL	BLK	8.50	10.8	7.5	257	763	340/50	E	C		72
**235/55R19 105VXL	BLK	8.50	10.8	7.5	245	741	340/50	E	C		71
**245/55R19 107VXL	BLK	8.50	10.8	7.5	253	753	340/50	E	C		72
*255/50R19 107VXL	BLK	8.50	10.8	8.0	265	738	340/50	E	C		72
*255/55R19 111VXL	BLK	8.50	10.8	8.0	265	763	340/50	E	C		72
*265/50R20 111VXL	BLK	8.50	10.8	9.0	277	774	340/50	E	C		72
*275/40R20 106VXL	BLK	8.50	10.8	9.5	278	728	340/50	E	C		72
*275/45R20 110VXL	BLK	8.50	10.8	9.0	273	756	340/50	E	C		72
*275/55R20 117VXL	BLK	8.50	10.8	8.5	284	810	340/50	E	C		72
*275/60R20 119VXL	BLK	8.50	10.8	8.0	279	838	340/50	E	C		72
**285/50R20 116VXL	BLK	8.50	10.8	9.0	297	794	340/50	E	C		72
**295/35R21 107WXL	BLK	8.50	10.8	10.5	301	739	340/50	E	C		72
**295/40R21 111WXL	BLK	8.50	10.8	10.5	301	769	340/50	E	C		72
**265/35R22 102VXL	BLK	8.50	10.8	9.5	271	745	340/50	E	C		72
**265/40R22 106VXL	BLK	8.50	10.8	9.5	271	771	340/50	E	C		72
**285/35R22 106VXL	BLK	8.50	10.8	10.0	290	759	340/50	E	C		72
**305/40R22 114VXL	BLK	8.50	10.8	11.0	313	803	340/50	E	C		72
**305/45R22 118VXL	BLK	8.50	10.8	10.0	303	833	340/50	E	C		72
**295/35R24 110VXL	BLK	8.50	10.8	10.5	301	816	340/50	E	C		72
**305/35R24 112VXL	BLK	8.50	10.8	11.0	313	824	340/50	E	C		72
**295/30R26 107VXL	BLK	8.50	10.8	10.5	301	839	340/50	E	C		72
**305/30R26 109VXL	BLK	8.50	10.8	11.0	313	844	340/50	E	C		72

* New Developing Sizes ** New Developing Sizes in 2014
The labeling information is subjet to change without notice.

A608

UTQG: 420 A A

1. Perfct handling performance and good cornering performance.
2. Asymmetric pattern shape, optimized variable pitch pattern design, provide quiet ride environment.
3. Nice driving pleasure comes from strong tread and soft sidewall.
4. Silica tread compound for low rolling resistance and good wet grip.

Summer Tire

Sizes Description	Sidewall Description	Tread Depth MM	Tread Depth 1/32"	Standard Rim	Section Width (mm)	OA. Diameter (mm)	Max. Pressure (kpa/PSI)				dB
185/60R14 82H	BLK	7.50	9.4	5.5	189	578	300/44	-	-	-	-
195/55R15 85V	BLK	7.80	9.8	6.0	201	595	300/44	-	-	-	-
195/60R15 88H	BLK	7.80	9.8	6.0	201	615	300/44	-	-	-	-
195/60R15 88V	BLK	7.80	9.8	6.0	201	615	300/44	-	-	-	-
205/55R16 91H	BLK	7.80	9.8	6.5	214	632	300/44	-	-	-	-
205/55R16 91V	BLK	7.80	9.8	6.5	214	632	300/44	-	-	-	-
215/55R16 93H	BLK	8.00	10.0	7.0	226	642	300/44	-	-	-	-
215/60R16 95H	BLK	8.00	10.0	6.5	221	664	300/44	-	-	-	-
225/60R16 98H	BLK	8.00	10.0	6.5	228	676	300/44	-	-	-	-
235/60R16 100H	BLK	8.00	10.0	7.0	240	688	300/44	-	-	-	-

The labeling information is subjet to change without notice.

A919

UTQG:420 A A

❶Four wide circumferential tread grooves deliver the ride stability and offer excellent performance on wet conditions. Improved grooves and bead profile design offer better ride stability, endurance and handling performance.

❷The open shoulder grooves prevent aquaplaning with enhanced wet grip performance and provide excellent water evacuation.Continuous tread blocks on both shoulder give great support to enhance the ride stability when cornering.

❸Variable pitch pattern and solid center ribs improve the ride stability, reduce the noise and deliver a comfortable ride.

❹High-density sipes with special compound deliver a smooth ride and improve traction on dry and wet roads. Jointless Nylon band and strong structure design provided the strong carcass to enhance the reliability and durability.



Summer Tire

Sizes Description	Sidewall Description	Tread Depth MM	Tread Depth 1/32"	Standard Rim	Section Width (mm)	OA. Diameter (mm)	Max. Pressure (kpa/PSI)				dB
235/70R16 106H	BLK	8.50	10.8	7.0	240	736	300/44	E	C		71
245/70R16 107H	BLK	8.50	10.8	7.0	248	750	300/44	E	C		71
245/70R16 111HXL	BLK	8.50	10.8	7.0	248	750	340/50	E	C		71
*255/65R16 109H	BLK	8.50	10.8	7.5	262	737	300/44	E	C		71
255/70R16 111H	BLK	8.50	10.8	7.5	260	764	300/44	E	C		71
265/70R16 112H	BLK	8.50	10.8	8.0	272	778	300/44	E	C		71
275/70R16 114H	BLK	8.50	10.8	8.0	279	792	300/44	E	C		72
**215/60R17 96H	BLK	8.50	10.8	6.5	221	680	300/44	E	C		71
*215/65R17 99H	BLK	8.50	10.8	6.5	221	710	300/44	E	C		71
225/60R17 99H	BLK	8.50	10.8	6.5	228	702	300/44	E	C		71
225/65R17 102H	BLK	8.50	10.8	6.5	228	724	300/44	E	C		71
235/60R17 102H	BLK	8.50	10.8	7.0	240	714	300/44	E	C		71
235/60R17 106HXL	BLK	8.50	10.8	7.0	240	714	340/50	E	C		71
235/65R17 104H	BLK	8.50	10.8	7.0	240	738	300/44	E	C		71
235/65R17 108HXL	BLK	8.50	10.8	7.0	240	738	300/44	E	C		71
245/65R17 107H	BLK	8.50	10.8	7.0	248	750	340/50	E	C		71
245/65R17 111HXL	BLK	8.50	10.8	7.0	248	750	300/44	E	C		71
**255/65R17 110H	BLK	8.50	10.8	7.5	260	764	300/44	E	C		71
265/65R17 112H	BLK	8.50	10.8	8.0	272	776	300/44	E	C		71
265/70R17 115H	BLK	8.50	10.8	8.0	272	804	300/44	E	C		71
*275/65R17 115H	BLK	8.50	10.8	8.0	279	791	300/44	E	C		72
**285/65R17 116H	BLK	8.50	10.8	8.5	292	802	300/44	E	C		72
**225/55R18 98H	BLK	8.50	10.8	7.0	233	705	300/44	E	C		71
**225/60R18 100H	BLK	8.50	10.8	6.5	228	727	340/50	E	C		71
235/55R18 104HXL	BLK	8.50	10.8	7.5	245	715	340/50	E	C		71
235/60R18 107HXL	BLK	8.50	10.8	7.0	240	739	300/44	E	C		71
*265/60R18 110H	BLK	8.50	10.8	8.0	272	775	300/44	E	C		71
*285/60R18 116H	BLK	8.50	10.8	8.5	290	802	300/44	E	C		72

* New Developing Sizes ** New Developing Sizes in 2014
The labeling information is subjet to change without notice.

A/T A929

UTQG:480 A B

❶Four main zigzag grooves and rough lateral blocks provide excellent traction on all kinds of road conditions.

❷The open shoulder grooves prevent aquaplaning with enhanced wet grip performance and provide excellent water evacuation. The white letter styling provide a artistic image.

❸The block tread design with multiple-sipes provide outstanding off-road traction and reduce tread damage on off-road condition.

❹Jointless Nylon band and strong structure design provided the strong carcass to enhance the reliability and durability. Special tread compound and wide footprint enhance tread life and deliver excellent braking on wet and dry roads.



All Season Tire

Sizes Description	Sidewall Description	Tread Depth MM	Tread Depth 1/32"	Standard Rim	Section Width (mm)	OA. Diameter (mm)	Max. Pressure (kpa/PSI)				dB
* P235/75R15 105S	OWL	9.00	11.4	6.5	235	733	300/44	-	-	-	-
* P235/75R15 109SXL	OWL	9.00	11.4	6.5	235	733	340/50	-	-	-	-
P215/70R16 99T/100T	RBL	9.00	11.4	6.5	221	768	300/44	-	-	-	-
P225/70R16 101T/103T	OWL	9.00	11.4	6.5	228	722	300/44	-	-	-	-
P235/70R16 104T/106T	OWL	9.00	11.4	7.0	240	736	300/44	-	-	-	-
P245/70R16 106T/107T	OWL	9.00	11.4	7.0	248	750	300/44	-	-	-	-
* P245/75R16 109T/111T	OWL	9.00	11.4	7.0	248	774	300/44	-	-	-	-
P255/70R16 109T/111T	OWL	9.50	12.0	7.5	260	764	300/44	-	-	-	-
P265/70R16 111T/112T	OWL	9.50	12.0	8.0	272	778	300/44	-	-	-	-
* P275/70R16 114T	OWL	9.50	12.0	8.0	279	792	300/44	-	-	-	-
** P225/65R17 100T/102T	OWL	9.00	11.4	6.5	228	724	300/44	-	-	-	-
** P235/65R17 103T/104T	OWL	9.00	11.4	7.0	240	738	300/44	-	-	-	-
** P245/65R17 105T/107T	OWL	9.00	11.4	7.0	248	750	300/44	-	-	-	-
* P245/70R17 108T/110T	OWL	9.00	11.4	7.0	248	776	300/44	-	-	-	-
* P255/65R17 108T/110T	OWL	9.50	12.0	7.5	259	762	300/44	-	-	-	-
P265/65R17 110T/112T	OWL	9.50	12.0	7.0	272	776	300/44	-	-	-	-
P265/70R17 113T/115T	OWL	9.50	12.0	8.0	272	804	300/44	-	-	-	-
* P275/65R17 115T	OWL	9.50	12.0	8.0	279	791	300/44	-	-	-	-
** P275/65R18 114T/116T	OWL	9.50	12.0	8.0	279	818	300/44	-	-	-	-
** P285/60R18 116T/120T	OWL	9.50	12.0	8.5	292	795	300/44	-	-	-	-
** P275/55R20 111T/113T	OWL	9.50	12.0	8.5	284	810	300/44	-	-	-	-
** P275/60R20 114T/115T	OWL	9.50	12.0	8.0	279	836	300/44	-	-	-	-
** P305/40R22 114T	OWL	10.00	12.6	11.0	310	803	300/44	-	-	-	-
** P305/45R22 118T	OWL	10.00	12.6	10.0	302	828	300/44	-	-	-	-
LT235/75R15 C 104/101S	OWL	11.50	14.4	6.5	233	733	350/51	-	-	-	-
LT31X10.50R15 C 109S	OWL	11.50	14.4	8.5	268	775	350/51	-	-	-	-
215R15C C 109/107S	RBL	11.50	14.4	6.0	218	724	375/55	-	-	-	-
245/75R15C C 107/105S	RBL	11.50	14.4	7.0	248	749	375/55	-	-	-	-
LT215/85R16 E 115/112S	OWL	11.50	14.4	6.0	216	772	550/80	-	-	-	-
LT225/75R16 E 115/112S	OWL	11.50	14.4	6.0	223	744	550/80	-	-	-	-
LT235/85R16 E 120/116S	RBL	12.00	15.0	6.5	235	806	550/80	-	-	-	-
LT245/75R16 E 120/116S	OWL	11.50	14.4	7.0	248	774	550/80	-	-	-	-
LT265/75R16 E 123/120S	OWL	12.00	15.0	7.5	267	804	550/80	-	-	-	-
LT285/75R16 D 122/119S	OWL	12.00	15.0	8.0	286	834	450/65	-	-	-	-
* 205R16C C 110/108R	OWL	11.50	14.4	5.5	200	738	375/55	-	-	-	-
185/75R16C D 104/102R	RBL	9.00	11.4	5.0	184	684	475/69	-	-	-	-
* LT245/75R17 E 121/118S	OWL	12.00	15.0	7.0	248	800	550/80	-	-	-	-
LT265/70R17 E 121/118S	OWL	12.00	15.0	8.0	272	804	550/80	-	-	-	-
** LT285/70R17 D 121/118S	OWL	12.00	15.0	8.5	284	831	450/65	-	-	-	-
** LT275/65R18 E 123/120S	OWL	12.00	15.0	8.0	279	813	550/80	-	-	-	-
** LT285/65R18 E 125/122S	OWL	12.00	15.0	8.5	290	826	550/80	-	-	-	-
** LT275/65R20 E 126/123S	OWL	12.00	15.0	8.0	279	864	550/80	-	-	-	-
** LT305/55R20 E 121/118S	OWL	12.00	15.0	9.5	315	843	550/80	-	-	-	-

* New Developing Sizes ** New Developing Sizes in 2014
The labeling information is subjet to change without notice.

European Technology @ Competitive Price

M/T A929

❶Three main zigzag grooves and aggressive pattern design provide outstanding traction on all kinds of road conditions.

❷High void ratio and open shoulder offer excellent resistance to aquaplaning and self-cleaning performance.

❸The block tread design with multiple-sipes provide outstanding off-road traction and reduce tread damage on off-road condition. Special casing profile and solid shoulder pattern enhance the max traction and cornering performance.

❹Jointless Nylon band and strong structure design provided the strong carcass to enhance the reliability and durability. Special tread compound and wide footprint enhance tread life and deliver excellent braking on wet and dry roads.



All Season Tire

Sizes Description	Sidewall Description	Tread Depth MM	Tread Depth 1/32"	Standard Rim	Section Width (mm)	OA. Diameter (mm)	Max. Pressure (kpa/PSI)				dB
LT31X10.50R15 C 109Q	RBL	13.50	16.8	8.5	268	775	350/51	-	-	-	-
*LT33X12.50R15 C 108Q	RBL	13.50	16.8	10.0	320	838	350/51	-	-	-	-
*LT35X12.50R15 C 113Q	RBL	14.50	18.2	10.0	326	890	350/51	-	-	-	-
LT235/85R16 E 120/116Q	RBL	13.50	16.8	6.5	235	806	550/80	-	-	-	-
LT245/75R16 E 120/116Q	RBL	13.50	16.8	7.0	248	771	550/80	-	-	-	-
LT265/75R16 E 123/120Q	RBL	13.50	16.8	7.5	267	804	550/80	-	-	-	-
*LT285/75R16 E 126/123Q	RBL	13.50	16.8	8.0	286	834	550/80	-	-	-	-
*LT305/70R16 E 124/121Q	RBL	14.50	18.2	9.0	310	838	550/80	-	-	-	-
**LT315/75R16 E 127/124Q	RBL	14.50	18.2	8.5	326	886	550/80	-	-	-	-
*LT265/70R17 E 121/118Q	RBL	13.50	16.8	8.0	272	804	550/80	-	-	-	-
*LT285/70R17 E 126/123Q	RBL	13.50	16.8	8.5	284	831	550/80	-	-	-	-
**LT35X12.50R17 E 125Q	RBL	14.50	18.2	10.0	326	890	450/65	-	-	-	-
**LT37X13.50R17 E 131Q	RBL	14.50	18.2	11.0	352	940	450/65	-	-	-	-
**LT33X12.50R18 E 118Q	RBL	13.50	16.8	10.0	320	838	450/65	-	-	-	-
**LT35X12.50R18 E 123Q	RBL	14.50	18.2	10.0	326	890	450/65	-	-	-	-
**LT37X13.50R18 E 129Q	RBL	14.50	18.2	11.0	352	940	450/65	-	-	-	-
**LT33X12.50R20 E 114Q	RBL	13.50	16.8	10.0	320	838	450/65	-	-	-	-
**LT35X12.50R20 E 121Q	RBL	14.50	18.2	10.0	326	890	450/65	-	-	-	-
**LT37X13.50R20 E 127Q	RBL	14.50	18.2	11.0	352	940	450/65	-	-	-	-
**LT33X12.50R22 E 109Q	RBL	13.50	16.8	10.0	320	838	450/65	-	-	-	-
**LT35X12.50R22 E 117Q	RBL	14.50	18.2	10.0	326	890	450/65	-	-	-	-
**LT37X13.50R22 E 123Q	RBL	14.50	18.2	11.0	352	940	450/65	-	-	-	-

* New Developing Sizes ** New Developing Sizes in 2014
The labeling information is subjet to change without notice.

A867

❶Three main zigzag grooves combined with lateral blocks provide excellent ride stability and great traction on all kinds of road conditions.

❷Continuous tread patterns on shoulder and solid shoulder ribs provide responsive handling and even wear.

❸Variable pitch patterns and multi-knife-cut tread pattern reduce vibration to offer the comfort and quiet ride.

❹Reinforced structure and special abrasion-resistant tread compound deliver extra puncture resistance and load bearing capability with more mileage.



Commercial Tire

Sizes Description	Sidewall Description	Tread Depth MM	Tread Depth 1/32"	Standard Rim	Section Width (mm)	OA. Diameter (mm)	Max. Pressure (kpa/PSI)				dB
**175/65R14C 90/88T	BLK	8.00	10.0	5.0	170	588	375/54	E	C		70
**165/70R14C 89/87T	BLK	8.00	10.0	5.0	177	584	375/54	E	C		70
185R14C 102/100R	BLK	8.50	10.8	5.5	188	650	450/65	E	C		71
195R14C 106/104R	BLK	8.50	10.8	5.5	198	666	450/65	E	C		71
** 185R15C 103/102R	BLK	8.50	10.8	5.5	188	674	450/65	E	C		71
195R15C 106/104R	BLK	8.50	10.8	5.5	198	693	450/65	E	C		71
195/70R15C 104/102R	BLK	9.00	11.4	6.0	201	655	450/65	E	C		71
**205/70R15C 106/104R	BLK	9.00	11.4	6.0	209	669	450/65	E	C		71
**215/70R15C 109/107R	BLK	9.50	11.8	6.5	221	683	450/65	E	C		72
225/70R15C 112/110R	BLK	9.50	11.8	6.5	228	697	450/65	E	C		72
*175/75R16C 101/99R	BLK	9.00	11.4	5.0	175	668	475/69	E	C		71
185/75R16C 104/102R	BLK	9.00	11.4	5.0	184	684	475/69	E	C		71
*195/60R16C 99/97T	BLK	9.00	11.4	6.0	201	640	475/69	E	C		71
195/65R16C 104/102R	BLK	9.00	11.4	6.0	201	660	475/69	E	C		71
195/75R16C 107/105R	BLK	9.00	11.4	5.5	196	698	475/69	E	C		71
205/65R16C 107/105R	BLK	9.00	11.4	6.0	209	672	475/69	E	C		71
*205/75R16C 110/108R	BLK	9.00	11.4	5.5	203	714	475/69	E	C		71
*215/60R16C 103/101T	BLK	9.50	11.8	6.5	221	664	475/69	E	C		72
215/65R16C 109/107R	BLK	9.50	11.8	6.5	221	686	475/69	E	C		72
*215/75R16C 113/111R	BLK	9.50	11.8	6.0	216	728	475/69	E	C		72
225/65R16C 112/110R	BLK	9.50	11.8	6.5	228	698	475/69	E	C		72
235/65R16C 115/113R	BLK	9.50	11.8	7.0	240	712	475/69	E	C		72

* New Developing Sizes ** New Developing Sizes in 2014
The labeling information is subjet to change without notice.

A866

❶Reinforced structure and special abrasionresistant tread compound deliver extrapuncture resistance and load bearing capability with more mileage

❷Continuous tread patterns on shoulder and solid shoulder ribs responsive handling and even wear.

❸Three main zigzag grooves combined with lateral blocks provide excellent ride stability and great tanction on all kids of road conditions.

❹White sidewall rib shows extraordinary appearance.

Sizes Description	Sidewall Description	Tread Depth MM	Tread Depth 1/32"	Standard Rim	Section Width (mm)	OA. Diameter (mm)	Max. Pressure (kpa/PSI)				dB
155R13C 90/88R	WSW	8.00	10.0	157	578	4.5	450/65	-	-	-	-
185R14C 102/100R	WSW	8.50	10.8	188	650	5.5	450/65	-	-	-	-
195R14C 106/104R	WSW	8.50	10.8	198	666	5.5	450/65	-	-	-	-
205/75R14C 109/107R	WSW	8.50	10.8	203	664	5.5	475/69	-	-	-	-
185R15C 103/102R	WSW	8.50	10.8	188	674	5.5	450/65	-	-	-	-
195R15C 106/104R	WSW	8.50	10.8	198	693	5.5	450/65	-	-	-	-
205/75R15C 109/107R	WSW	8.50	10.8	203	689	5.5	475/69	-	-	-	-

The labeling information is subjet to change without notice.

A868

UTQG:420 A B

❶Four main groovs provide good driving stability and wet performance.

❷Reasonable pattern area, pertect collocation of every grooves.

❸Special tread compound, ensure tire performance stability in all kinds of weather conditions.

❹White sidewall rib shows extraordinary appearance.



Sizes Description	Sidewall Description	Tread Depth MM	Tread Depth 1/32"	Standard Rim	Section Width (mm)	O.A. Diameter (mm)	Max. Pressure (kpa/PSI)				dB
*P185/75R14 89S	WSW	8.50	10.8	5.0	184	634	300/44	-	-	-	-
*P195/75R14 92S	WSW	8.50	10.8	5.0	196	648	300/44	-	-	-	-
*P205/75R14 95S	WSW	8.50	10.8	5.5	203	664	300/44	-	-	-	-
*P205/70R15 95S	WSW	8.50	10.8	6.0	209	669	300/44	-	-	-	-
P205/75R15 97T	WSW	8.50	10.8	5.5	203	689	300/44	-	-	-	-
*P215/70R15 98T	WSW	8.50	10.8	6.5	221	683	300/44	-	-	-	-
P215/75R15 100T	WSW	8.50	10.8	6.0	216	703	300/44	-	-	-	-
*P225/70R15 100T	WSW	8.50	10.8	6.5	228	697	300/44	-	-	-	-
P225/75R15 102T	WSW	8.50	10.8	6.0	223	719	300/44	-	-	-	-
P235/75R15 105S	WSW	8.50	10.8	6.5	235	733	300/44	-	-	-	-

* New Developing Sizes

The labeling information is subjet to change without notice.

A501

❶Central straight & 2 wide Zig-Zag circumferential grooves, with the design of convexes in the bottom, improve the traction, shorten braking distance and increase the stability on the snow road.

❷Wide rolling tread, by using computer-optimized design, make sure enough contact area for more grip. The wide open shoulder grooves prevent aquaplaning with enhanced wet grip and provide excellent water & snow evacuation.

❸Bionic tread pattern design makes rge whole tread blocks' stiffness more logocal, with the optimized deployment of "Z" shape sipes, provide great grip on snow & ice conditions.

❹Special tread compound remains flexible at lower temperatures to make sure the grip on winter road conditions, while reduce the rolling resistance.

Winter Tire

Sizes Description	Sidewall Description	Tread Depth MM	Tread Depth 1/32"	Standard Rim	Section Width (mm)	OA. Diameter (mm)	Max. Pressure (kpa/PSI)				dB
* 165/70R13 79T	BLK	8.00	10.0	5.0	170	562	300/44	-	-	-	-
* 175/70R13 82T	BLK	8.00	10.0	5.0	177	576	300/44	-	-	-	-
** 155/65R14 75T	BLK	8.00	10.0	4.5	154	557	300/44	-	-	-	-
** 165/60R14 75T	BLK	8.00	10.0	5.0	170	554	300/44	-	-	-	-
** 165/65R14 79T	BLK	8.00	10.0	5.0	170	570	300/44	-	-	-	-
** 165/70R14 85TXL	BLK	8.00	10.0	5.0	170	588	340/50	-	-	-	-
* 175/65R14 82T	BLK	8.00	10.0	5.0	177	584	300/44	-	-	-	-
* 175/70R14 88TXL	BLK	8.00	10.0	5.0	177	602	340/50	-	-	-	-
* 185/60R14 82T	BLK	8.00	10.0	5.5	189	578	300/44	-	-	-	-
* 185/65R14 86T	BLK	8.00	10.0	5.5	189	609	300/44	-	-	-	-
* 185/70R14 92TXL	BLK	8.00	10.0	5.5	189	616	340/50	-	-	-	-
* 195/70R14 95TXL	BLK	8.00	10.0	6.0	201	630	340/50	-	-	-	-
** 175/65R15 84H	BLK	8.00	10.0	5.0	177	609	300/44	-	-	-	-
** 185/55R15 86HXL	BLK	8.00	10.0	6.0	194	585	300/44	-	-	-	-
* 185/60R15 88HXL	BLK	8.00	10.0	5.5	189	603	340/50	-	-	-	-
* 185/65R15 88H	BLK	8.00	10.0	5.5	189	621	300/44	-	-	-	-
* 195/60R15 88H	BLK	8.50	10.8	6.0	201	615	300/44	-	-	-	-
* 195/65R15 95TXL	BLK	8.50	10.8	6.0	201	635	340/50	-	-	-	-
** 205/60R15 91H	BLK	8.50	10.8	6.0	209	627	300/44	-	-	-	-
* 205/65R15 94H	BLK	8.50	10.8	6.0	209	647	300/44	-	-	-	-
** 205/70R15 96T	BLK	8.50	10.8	6.0	209	669	300/44	-	-	-	-
* 215/70R15 98T	BLK	8.50	10.8	6.5	221	683	300/44	-	-	-	-
* 205/55R16 91H	BLK	8.50	10.8	6.5	214	632	300/44	-	-	-	-
* 205/60R16 96HXL	BLK	8.50	10.8	6.0	209	652	340/50	-	-	-	-
* 215/60R16 99HXL	BLK	8.50	10.8	6.5	221	664	340/50	-	-	-	-
* 215/65R16 98H	BLK	8.50	10.8	6.5	221	686	300/44	-	-	-	-
** 215/70R16 100T	BLK	8.50	10.8	6.5	217	708	300/44	-	-	-	-
* 225/60R16 98H	BLK	8.50	10.8	6.5	228	676	300/44	-	-	-	-
** 225/70R16 107TXL	BLK	8.50	10.8	6.5	228	722	300/44	-	-	-	-
* 235/70R16 106T	BLK	9.00	11.4	7.0	240	736	300/44	-	-	-	-
** 245/70R16 111TXL	BLK	9.00	11.4	7.0	248	750	340/50	-	-	-	-
** 265/70R16 112T	BLK	9.00	11.4	8.0	272	778	300/44	-	-	-	-
** 215/60R17 96H	BLK	9.00	11.4	6.5	221	690	300/44	-	-	-	-
** 215/65R17 99H	BLK	9.00	11.4	6.5	221	710	300/44	-	-	-	-
** 225/60R17 99H	BLK	9.00	11.4	6.5	228	702	300/44	-	-	-	-
* 225/65R17 102T	BLK	9.00	11.4	6.5	228	724	300/44	-	-	-	-
* 235/65R17 108TXL	BLK	9.00	11.4	7.0	240	738	340/50	-	-	-	-
* 245/65R17 111TXL	BLK	9.00	11.4	7.0	248	750	340/50	-	-	-	-
** 265/65R17 112T	BLK	9.00	11.4	8.0	272	776	300/44	-	-	-	-
* 265/70R17 115T	BLK	9.00	11.4	8.0	272	804	300/44	-	-	-	-
** LT225/75R16 115/112S	BLK	11.5	14.4	6.0	223	744	550/80	-	-	-	-
** LT245/75R16 120/116S	BLK	11.5	14.4	7.0	248	774	550/80	-	-	-	-
** 195/70R15C 104/102R	BLK	9.50	12.0	6.0	201	655	450/65	-	-	-	-
** 215/70R15C 109/107R	BLK	10.00	12.6	6.5	221	683	450/65	-	-	-	-
** 225/70R15C 112/110R	BLK	10.00	12.6	6.5	228	697	450/65	-	-	-	-
** 185/75R16C 104/102R	BLK	9.50	12.0	5.0	184	684	475/69	-	-	-	-
** 195/65R16C 104/102R	BLK	9.50	12.0	6.0	201	660	475/69	-	-	-	-
** 195/75R16C 107/105R	BLK	9.50	12.0	5.5	196	698	475/69	-	-	-	-
** 205/65R16C 107/105R	BLK	9.50	12.0	6.0	209	672	475/69	-	-	-	-
** 215/65R16C 109/107R	BLK	10.00	12.6	6.5	221	686	475/69	-	-	-	-
** 225/65R16C 112/110R	BLK	10.00	12.6	6.5	228	698	475/69	-	-	-	-
** 235/65R16C 115/113R	BLK	10.00	12.6	7.0	240	712	475/69	-	-	-	-

* New Developing Sizes ** New Developing Sizes in 2014
The labeling information is subjet to change without notice.

A502

❶Four wide circumferential tread grooves and lateral grooves with fine sipes provide efficient water evacuation, outstanding wet performance.The optimized deployment of "Z" shape sipes, provide great grip on snow & ice conditions.

❷Continuous block patterns on shoulder enhance the ride stability at high speed cornering. The rim protector will protect wheels from curb damage

❸Continuous outside tread blocks enhance excellent performance and precise control when cornering at high speed. The special rib segment design optimize contact pressure distribution, improve road contact area and provide precise control. The serrated groove walls absorb noise and deliver a quieter ride.

❹Special tread compound remains flexible at lower temperatures to make sure the grip on winter road conditions and reduce the rolling resistance.

Winter Tire

Sizes Description	Sidewall Description	Tread Depth MM	Tread Depth 1/32"	Standard Rim	Section Width (mm)	OA. Diameter (mm)	Max. Pressure (kpa/PSI)				dB
*195/50R15 82H	BLK	8.50	10.8	6.0	201	577	300/44	-	-	-	-
*195/55R15 85H	BLK	8.50	10.8	6.0	201	595	300/44	-	-	-	-
*195/60R15 88H	BLK	8.50	10.8	6.0	201	615	300/44	-	-	-	-
*195/65R15 91H	BLK	8.50	10.8	6.0	201	635	300/44	-	-	-	-
*195/55R16 91HXL	BLK	8.50	10.8	6.0	190	619	340/50	-	-	-	-
*205/55R16 94HXL	BLK	8.50	10.8	6.5	214	632	340/50	-	-	-	-
*215/55R16 97HXL	BLK	8.50	10.8	7.0	226	642	340/50	-	-	-	-
*225/55R16 99HXL	BLK	8.50	10.8	7.0	233	680	340/50	-	-	-	-
**205/45R17 88HXL	BLK	8.50	10.8	7.0	206	616	340/50	-	-	-	-
**205/50R17 93HXL	BLK	8.50	10.8	6.5	214	638	340/50	-	-	-	-
**215/45R17 91HXL	BLK	8.50	10.8	7.0	213	626	340/50	-	-	-	-
**215/50R17 95HXL	BLK	8.50	10.8	7.5	245	719	340/50	-	-	-	-
**215/55R17 98HXL	BLK	8.50	10.8	7.0	226	668	340/50	-	-	-	-
*225/45R17 94HXL	BLK	8.50	10.8	7.5	225	634	340/50	-	-	-	-
**225/50R17 98HXL	BLK	8.50	10.8	8.0	265	739	340/50	-	-	-	-
**225/55R17 101HXL	BLK	8.50	10.8	7.0	233	680	340/50	-	-	-	-
*235/45R17 97HXL	BLK	8.50	10.8	7.5	236	644	340/50	-	-	-	-
**235/55R17 103HXL	BLK	8.50	10.8	7.5	245	690	340/50	-	-	-	-
**225/40R18 92HXL	BLK	8.50	10.8	8.5	234	637	340/50	-	-	-	-
**235/40R18 95HXL	BLK	8.50	10.8	8.5	241	645	340/50	-	-	-	-
**245/45R18 100HXL	BLK	8.50	10.8	8.0	243	677	340/50	-	-	-	-
**255/55R18 109HXL	BLK	8.50	10.8	8.0	265	737	340/50	-	-	-	-

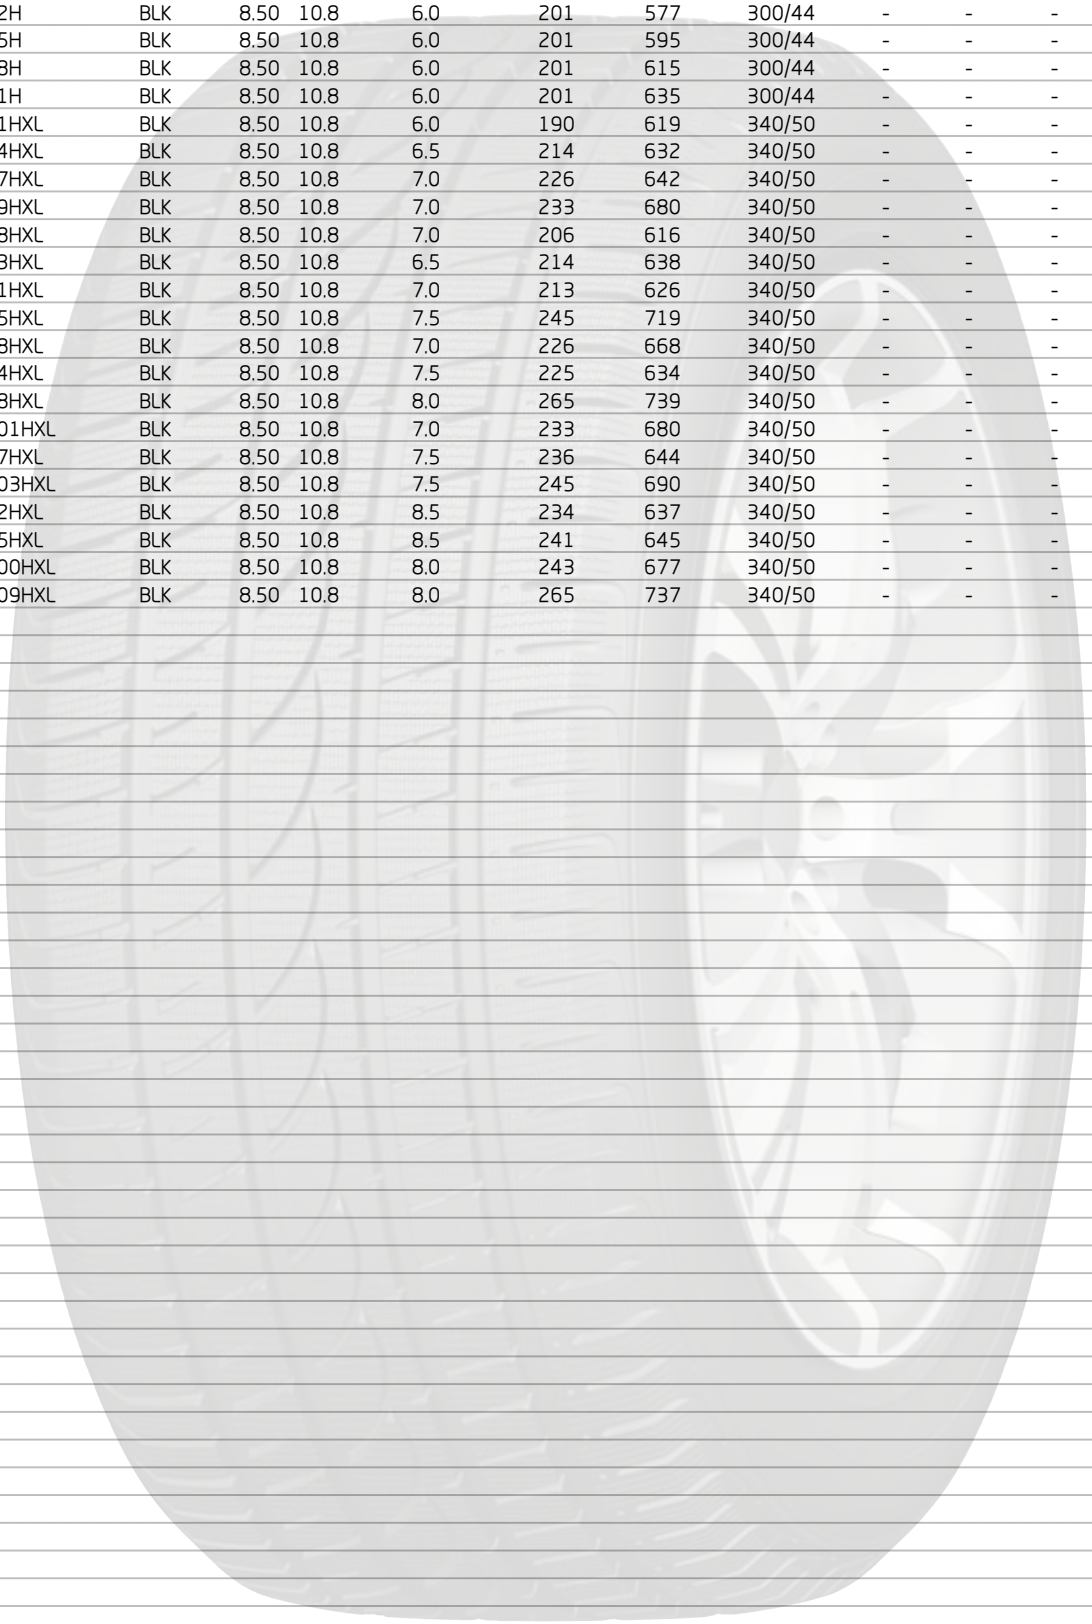

* New Developing Sizes ** New Developing Sizes in 2014
The labeling information is subjet to change without notice.

Technical File

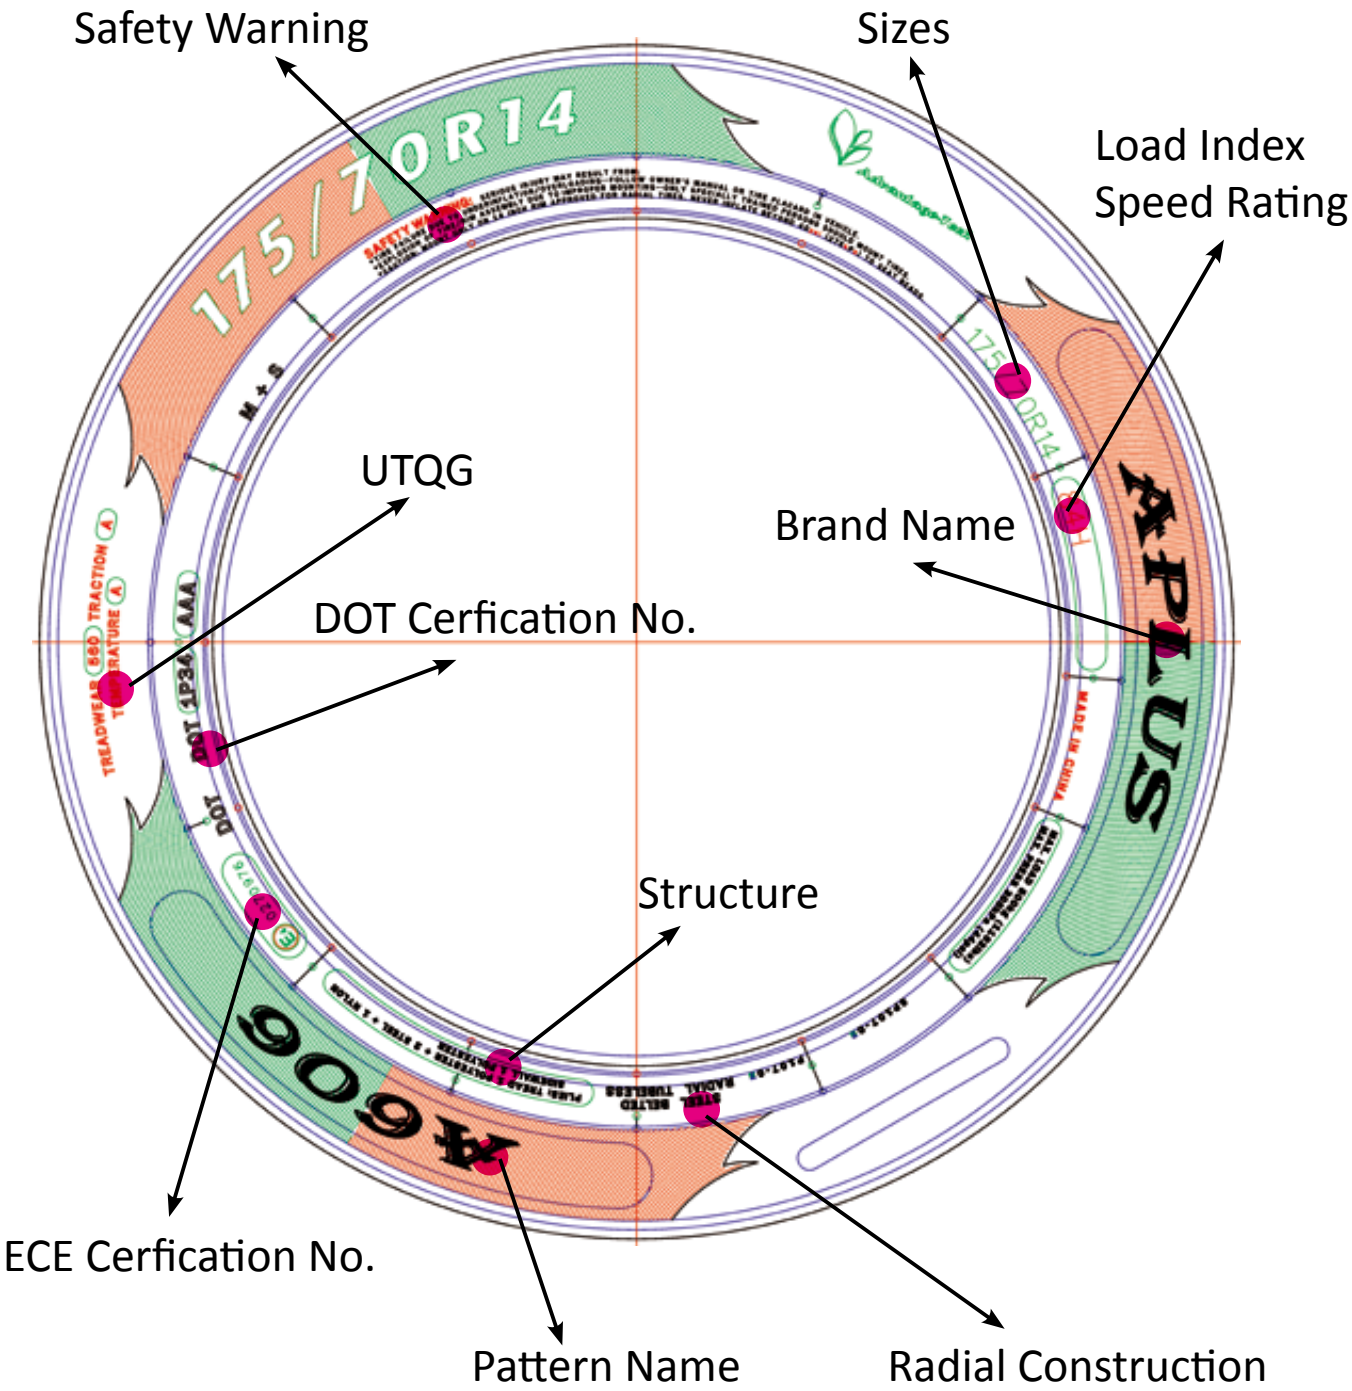

Limited Warranty

Shandong Haohua Tire Co., Limited warrants, subject to the terms, conditions, and limitations stated herein, tires it sells to be free from defects in materials and workmanship.

1. WHO IS COVERED BY THIS LIMITED WARRANTY?

(1). You are the authorized distributors from Shandong Haohua Tire.

(2). Your tires bear the Department of Transportation prescribed tires identification numbers and are not branded "NA" (Not Adjustable) or "Blem" (Blemish), and

(3). Your tires have been used only on the vehicle on which they were originally installed according to the vehicle manufacturer's or tire manufacture's recommendations, and your tires were purchased within 3 years.

2. WHAT IS COVERED AND FOR HOW LONG?

Shandong Haohua Tire warrants that if a tire becomes unserviceable due to an eligible adjustable conditions during the tread life (defined below) within 3 years from the original date of manufacture. The tire will be replaced by an equivalent new tire. A replacement charge may be required in order to obtain a replacement tire (as defined below).Or, a credit can be granted based on tread remaining.

3. REPLACEMENT CHARGE?

For tires being removed from service due to a defect in manufacture's workmanship or materials, but not within the first 2/32" wear, the replacement price will be calculated by multiplying the current selling price(or sale price if original invoice is available) by the percentage of original tread depth that has been worn from tire.

4. WHAT IS NOT COVERED?

This warranty does not cover tires that become unserviceable due to cuts, snag or punctures.

1. Conditions resulting from road hazards, such as impact damage, cuts, snag or punctures.
2. Conditions resulting from improper installation, wheel misalignment, or tire/wheel assembly imbalance.
3. Conditions or irregular wear resulting from consumer damage, such as improper tire and vehicle maintenance, misuse, abuse or accident.
4. Tires which have been repaired, retreaded, or reclaimed.
5. Tires worn beyond the Tread wear indicator.
6. Ride complaints after the first 25% tread wear.
7. Ozone or weather checking on tires over 3 years from the date of manufacture.

5. WHEN DOES THE WARRANTY END?

A tire has delivered its full original tread life and the new tire coverage of this warranty ends when the tread wear indicators become visible, or three(3) years from the date of original tire manufacture or new tire purchase date (without proof of purchase, date of manufacture will be used or determine age).

6. OBLIGATIONS

In order to be eligible for the limited Warranty Service, a Official Warranty Claim Form must be filled out and sent into Shandong Haohua Tire along with DOT number(s) and serial number(s) cut off from the tire, picture(s) of the tire and of the adjustable condition visibly marked on the tire.

7. DISCLAIMER

This warranty, or any warranty stated or referred to herein, is exclusive and in lieu of any other warranty regarding the quality of tires, whether expressed or implied, and remedies for breach thereof shall be limited to those specifically provided herein.

8. Remark

Proper vehicle and tire care is necessary to obtain the expected wear from a tire, It is your obligation to properly maintain your tires and the vehicle upon which they are mounted, including:

(A) Operating your tires at the inflation pressure recommended by the vehicle manufacturer

(B) Keep your tire/wheel assemblies in balance.

(C) Maintain proper wheel alignment.

Shandong Haohua Tire Co., Limited

山东昊华轮胎有限公司
SHANDONG HAOHUA TIRE CO., LTD

Add: houzhen industry zone, shouguang, shandong, China.
Tel: 0086-536-2235558 Fax: 0086-536-2235558
http://www.haohuatire.com